
120V POLAR 2 NEON

INSTALLATION INSTRUCTIONS
P2-NF Series Bulk Reels



INSTALLATION INSTRUCTIONS

P2-NF Series



⚠ WARNING

These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions, current electrical codes, and/or the current National Electric Code (NEC).


⚠ WARNING

Use this fixture with P2-NF-CONKIT-8A only. Any other power feed may damage the fixture. Not intended for hardwire use.

⚠ WARNING

To reduce the risk of fire, electric shock or injury to persons, use this flexible light only with American Lighting recommended drivers, controllers, power connectors, splices and extensions.

⚠ WARNING

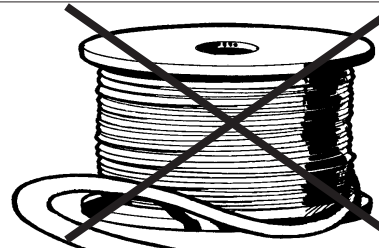

Do not operate Polar 2 Neon while it is coiled on the reel.

⚠ WARNING

To reduce the risk of fire, electric shock or injury to persons, make sure that the electrical power to the fixture is disconnected at the source prior to installation or any servicing.

SAFETY INFORMATION

- Read all installation instructions before beginning; if not qualified, do not attempt installation. Contact a qualified electrician.
- To reduce the risk of fire, electric shock, or injury to persons, pay close attention to this manual and stay within its guidelines when using this product. Save these instructions for future use.
- Do not cover this product as the covering may cause rope to overheat, melt, or ignite.
- Do not operate Polar 2 Neon while it is tightly coiled.
- Do not submerge flexible light in liquids, or use the product in the vicinity of standing water or other liquids.
- Do not route the cord or Polar 2 Neon through walls, ceilings, doors, windows, or any similar part of the building structure.
- Secure this flexible light using only factory recommended mounting clips (P2-NF-CLIPS), track (P@-NF-TRACK-3), or channel (P2-NF-CHAN-3) all sold separately.
- Do not secure this product or its cord with staples, nails, or like means that may damage the outer jacket or cord insulation.
- Do not use if there is any damage to the PVC housing or power cord insulation. Inspect periodically.
- Do not install on gates or doors, where subject to continuous flexing.
- Do not install in tanks or enclosures of any kind.
- Do not install near flammable liquids.
- Risk of fire or electric shock. Do not replace attachment plug. Discard product if attachment plug is damaged.
- Risk of fire or electric shock. Uncoil flexible light prior to plugging in.
- This product has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not alter plug.
- Follow instructions carefully when splicing Polar 2 Neon sections or attaching power cords. Ensure that all connections, including the end cap on the last segment, are properly installed with dielectric grease and shrink tube to preclude the entrance of water (outdoor applications).
- 120V Polar 2 Neon can only be cut at 18" intervals as indicated by the cutting marks printed on the side of the PVC housing. Failure to cut at a cut mark will result in a loss of light. Before making any cuts or attaching any power cords or jumpers, be sure power source is disconnected!
- ETL Listing for 120V Polar 2 Neon is void if product is cut.
- This product is designed for use by a qualified installer.
- This product is for decorative use only. Not to be used by children as a toy. Keep out of reach of small children.
- Do not exceed 150ft maximum run distance in any single run.

⚠ WARNING

When using outdoor portable lighting products, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following:

- Use dielectric grease and shrink tube at all power connections, including end cap when using outdoors.
- Use ground fault circuit interrupter (GFCI) protection on the circuit(s) or outlet(s) when using outdoors.
- Use only UL approved outdoor extension cords, such as type SW, SOW, STW, STOW, SJW, SJOW, SJTW, or SJTOW. This designation is marked on the jacket of the extension cord.

PRODUCT INFORMATION



120V Polar 2 Neon is sold in 150ft reels. Each reel includes a pre-attached 5ft power adapter cord (4C x 18AWG, with plug and 8A inverter), four spare DIY power adapter cords, and an end cap on the dead end. Mounting accessories include P2-NF-CLIPS (bag of ten aluminum mounting clips), P2-NF-TRACK-3 (3ft plastic track) and P2-NF-CHAN-3 (3ft mounting channel); all sold separately. Jumpers (linking extensions) include 6", 3ft, 10ft and 20ft lengths (P2-NF-JUMP-5, P2-NF-JUMP-3, P2-NF-JUMP-10, and P2-NF-JUMP-20, respectively), sold separately. Power consumption = 2.4 W/ft; Maximum run = 150 feet. If cut, the Polar 2 Neon loses its ETL listing.



CUTTING AND CONNECTING POLAR 2 NEON (SEE FIGURES 1-5)

NOTE: Reels include one pre-attached power adapter cord with 4 additional power adapter cords.

1. Ensure the attached power adapter cord is fully secure by tightening threaded collar at connection. See Figure 1.
2. Determine the required length for the lighting application.
3. Cut the Polar 2 Neon squarely at the nearest cut mark using a PVC pipe cutting tool or sharp shears. Cut marks are located every 12” and marked on the side of the housing. See Figure 1.
4. If using a new reel with the power cord attached, skip to steps 10 and 11. If using a previously cut length of Polar 2 Neon, you’ll need to add a DIY power connection kit (steps 4-9).
5. Trim off any wires that protrude from the cut end of the Polar 2 Neon.
6. Holding the non-pointed side of the power pin with a pair of pliers, line up the pointed pins on the other end with the four conductors inside the Polar 2 Neon. See Figure 2.
7. Push the pointed pins into the Polar 2 Neon until flush, being sure to make solid contact with the flexible light’s internal wires.
8. Slide the shrink tube over the power pins, onto the Polar 2 Neon. See Figure 3.
9. Push the power cord sheath onto the assembly until fully seated. See Figure 4.
10. Use heat to affix the heat shrink tube making sure that it is centered over the junction of the Polar 2 Neon and the power cord sheath.
11. When using splice kits and/or jumpers, follow steps 4-9 above, making connections in a similar manner.
12. Attach end cap to other end of flexible light to cover exposed dead end.

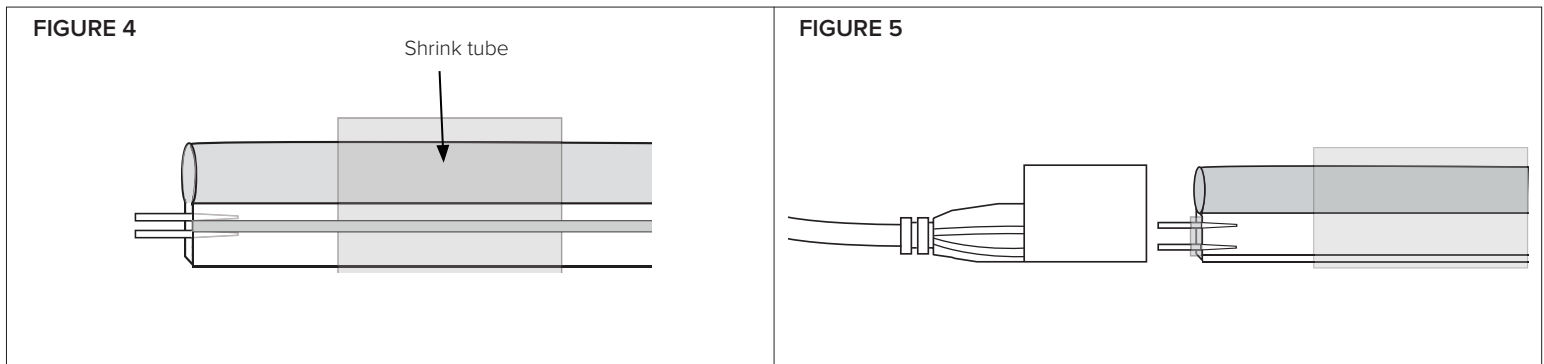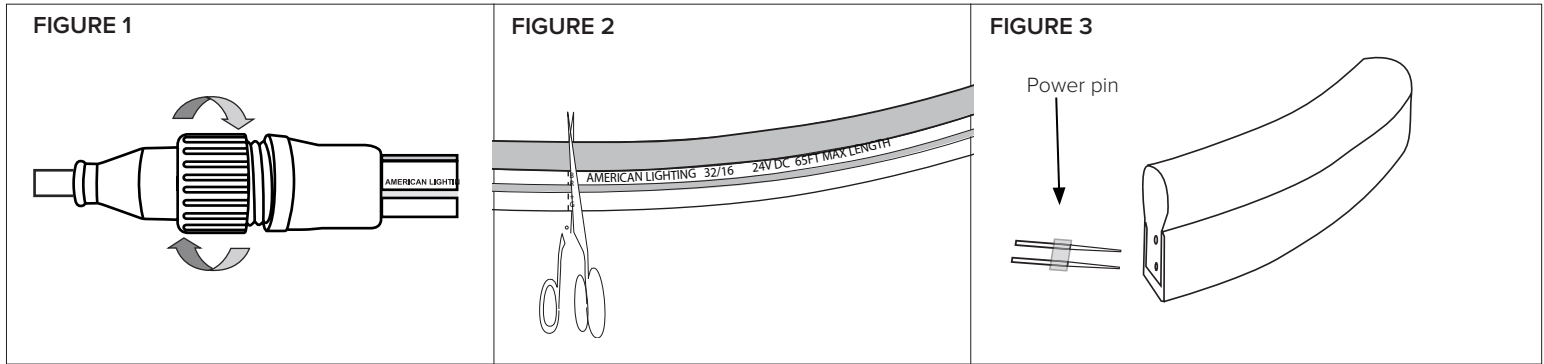



MOUNTING

Note: Polar 2 Neon and Polar 2 RGB Neon share the same track, channel and end caps.


1. Make mounting clips using cut pieces of track or order clips (P2-NF-CLIPS, 10 per pack, sold separately) for curves and Shapes on a flat mounting surface; or for straight line applications, use P2-NF-TRACK-3 (3ft length, sold separately) mounting tracks; P2-NF-CHAN-3 (3ft aluminum channel) is also available (sold separately).
2. Make sure that the distance between any two parallel runs of lighting is at least 1/2" apart.
3. Gently press flexible light into track, channel and/or clips so that it snaps into place.

TO REPLACE FUSE (SEE FIGURE 6):

This plug contains an electrical fuse as a safety feature.




1. Disconnect power before replacing the fuse.
2. Grasp plug and remove from the receptacle or other outlet device.
3. Do not unplug by pulling on the cord.
4. Slide open the fuse access cover (See figure 5).
5. Remove old fuse carefully.
6. Never attempt to replace the fuse with a higher wattage fuse. Use only 8Amp 125Volt fuse. Failure to do so may be a fire hazard. (One spare fuse is included; stored inside plug for convenience)
7. Set new fuse in holder and close fuse access cover.

FIGURE 6

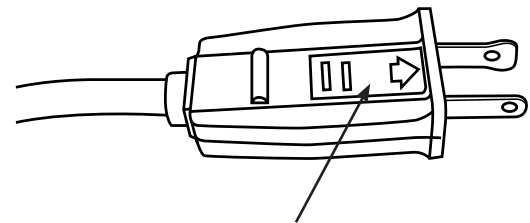

Fuse is inside plug.
Slide open fuse access cover as shown.

**DO NOT TWIST, HANG VERTICALLY, SUSPEND UNSUPPORTED IN THE MIDDLE, BEND UPWARDS (ARCH) OR DOWNWARDS (DIP).
MAXIMUM BEND RADIUS FOR SIDE-TO-SIDE BENDS IS SHOWN BELOW.**

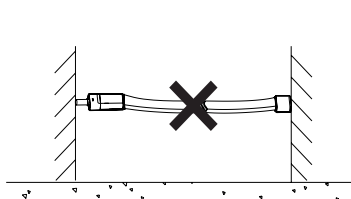

MAXIMUM BEND
RADIUS = 50mm

