

Integrated LED

- > Energy Saving 11.5 Watt
- > Uses 75% Less Energy than Equivalent 60 Watt Incandescent Bulb
- > Soft White 3000K CCT
- > Lasts 45.6 years or 50,000 Hours Continuous Use
- > Maintenance Free No Bulb Replacements
- > 5 Year Limited Warranty
- > US Patent # 9500352, 9541270, D776326
- > CND Patent # 169113



TO ORDER:

www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754

7" Spin Light™

810 lm | 120VAC | Model 54606211 | Part SL-7-11-830-SV-N



SPECIFICATIONS

Model 54606211

Part SL-7-11-830-SV-N

Description 7" Spin Light

Input Voltage (VAC) 120 Wattage 11.5

Dimmablity Non-Dimmable
Average Rated Life¹ 50,000 hours

Typical Lumens² 810
CCT³ 3000K
Location Rating UL Damp

CRI⁴ 80
Beam Angle Operating 120

Temperature Min -4°F (-20° C)

Max 95°F (35° C)

Power Factor >0.9 R9 11

DUV +0.00005

CBCP 223
Operating Frequency (Hz) 60


- 1 Hours lifetime with 70% lumen maintenance
- 2 Thermally stable typical lumens (±10%)
- 3 Thermally stable CCT (±10%)
- 4 Color rendering index/Ra









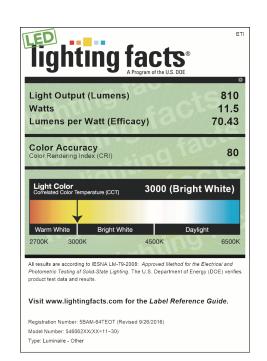



7" Spin Light™

810 lms | 120VAC | Model 54606211 | Part SL-7-11-830-SV-N



SHIPPING INFORMATION

Model 54606211

 Part
 SL-7-11-830-SV-N

 UPC
 849489000893

 Product Dimensions (W x H in.) Product
 7 3/32" x 3 1/2"

18 x 8.9 Dimensions (L x W x H cm.) Product 0.77 Weight (lbs.) N/A **Inner Carton Quantity** N/A **Inner Carton Bar Code** N/A Inner Carton Dimensions (L x W x H in.) Inner Carton Dimensions (L x W x H cm.) N/A Inner Carton Weight (lbs) N/A 5 **Master Carton Quantity**

Master Carton Bar Code 50849489000898

Master Carton Dimensions (L x W x H in.) 1' 8 33/64" x 7 29/32" x 8 17/64"

Master Carton Dimensions (L x W x H cm.) 52.1 x 20.1 x 21..0

Master Carton Weight (lbs) 5.83
Pallet Quantity 300

AVAILABLE ACCESSORIES

ModelDescription95460621101Diffuser Lens

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

TO ORDER: www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754 ETi Solid State Lighting, Inc. 720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256