

WARNING:


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- Always use correct lamp type and wattages.

FOR USE WITH:

- | | | |
|-------|--------|-------|
| • 50 | • HE3 | • MDB |
| • BL | • HET | • MP |
| • CDA | • HETD | • RW |
| • DIL | • HETL | • SP |
| • EFT | • LPT | • U3 |
| • EP | • LR4 | • U4 |


What is a NEMA "G" (Grid) fixture?

- All Williams grid fixtures (NEMA Type "G") are designed to fit securely into a standard NEMA Type "G", 1" nominal T-bar system.

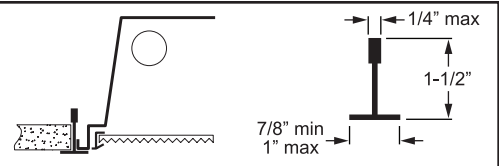

1. Follow the steps below to install the fixture(s) into a NEMA Type "G" ceiling system:
 - a. Raise the fixture through the ceiling opening and rest the fixture in the grid system.
 - b. Center the fixture within the opening.
 - c. Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
 - d. Refer to local codes for other installation requirements.
2. Once the fixture is installed into the ceiling system, follow the steps below to complete necessary electrical connections:
 - a. Remove access plate on the back of the fixture (see illustration below).
 - b. Remove ballast supply wires from access plate.
 - c. Make wire connections in accordance with local codes. Ground screw is provided on access plate.
 - d. Re-install access plate.

Access Plate
w/(2) 7/8" K.O.'s

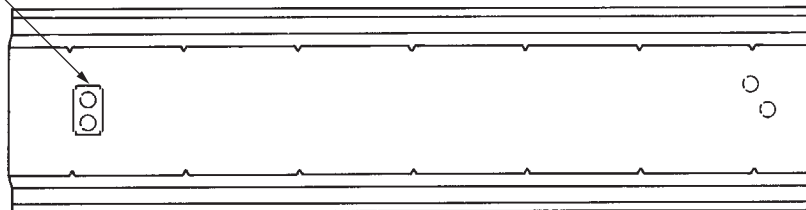

Note: Refer to individual product specification sheets for further information.