
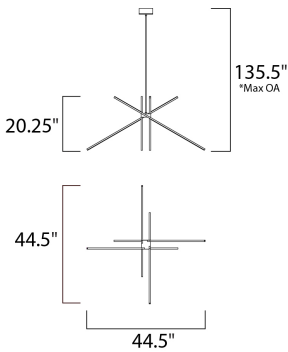


# Alumilux Suspension |

E41443-SA

Job Name: \_\_\_\_\_ Job Type: \_\_\_\_\_ Quantity: \_\_\_\_\_ Comments: \_\_\_\_\_

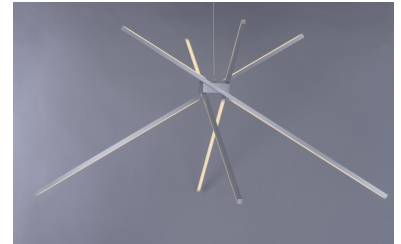

\*max overall height

**Measurements:**

<u>Height</u>	<u>Width</u>			
20.25"	44.50"			
<u>Max OAH</u>	<u>Min OAH</u>			
135.25"	22.75"			
<u>Hanging Weight</u>	<u>Canopy Width</u>	<u>Canopy Height</u>	<u>Canopy Length</u>	
4.73 lb	5.00"	2.25"	5.00"	

**Lamping:**

LED PCB	1,610 Rated Lumens
4 5.75W PCB	3000 Color Temperature
23 total watt	90+ CRI
Dimmable : Electronic Low Voltage (ELV)	Input Voltage: 120

**Shipping:**

<u>Carton Weight</u>	<u>Carton Width</u>	<u>Carton Height</u>	<u>Carton Length</u>
5.39 lb	4.72"	46.46"	9.45"
<u>Master Pack Weight</u>	<u>Master Pack Width</u>	<u>Master Pack Height</u>	<u>Master Pack Length</u>
23.76 lb	10.24"	10.24"	47.24"
<u>Master Pack Qty</u>	<u>UPC</u>	<u>UPS</u>	
4.0000	845094081173	Yes	

**Finish:**

Satin Aluminum SA

**Material:**

Grass Fabric + Steel

**Certification:**

Dry Location  
Energy Star  
CA Title 24  
ADA

**Additional:**

PCB (Included)  
Adjustable  
Slope: 120