
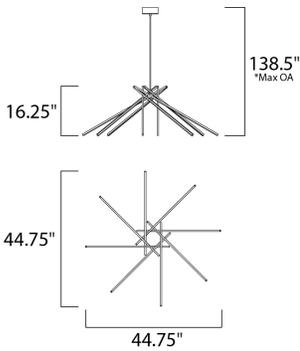
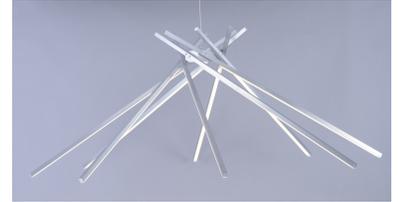
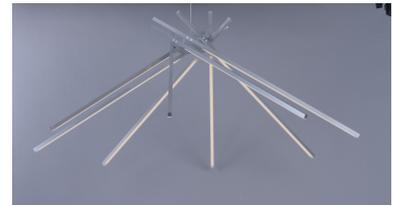


Alumilux Suspension |

E41445-SA

Job Name: _____ Job Type: _____ Quantity: _____ Comments: _____

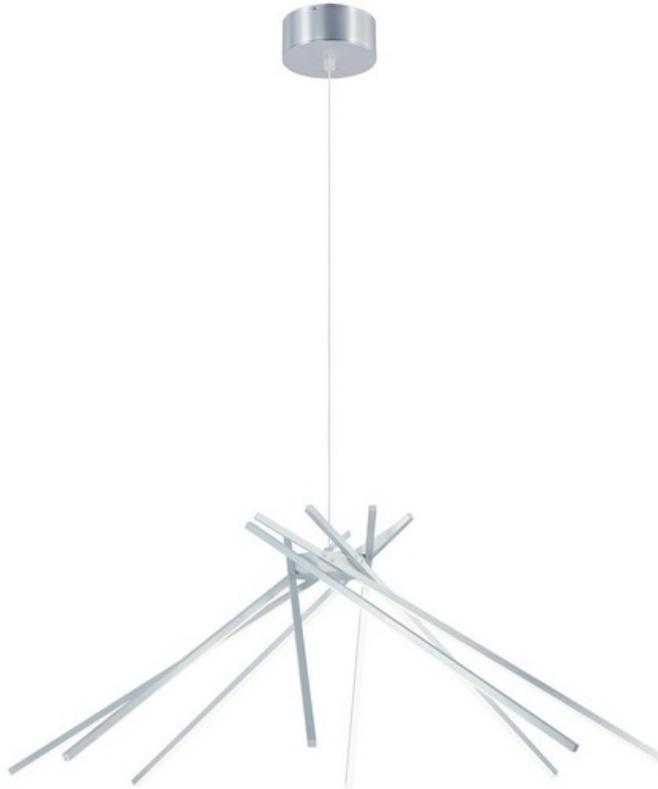

*max overall height

Measurements:

<u>Height</u>	<u>Width</u>	<u>Length</u>	
16.25"	44.75"	44.75"	
<u>Max OAH</u>	<u>Min OAH</u>		
138.50"	18.75"		
<u>Hanging Weight</u>	<u>Canopy Width</u>	<u>Canopy Height</u>	<u>Canopy Length</u>
8.47 lb	5.00"	2.25"	5.00"

Lamping:

LED PCB	1,890 Rated Lumens
8 3.38W PCB	3000 Color Temperature
27 total watt	90+ CRI
Dimmable : Electronic Low Voltage (ELV)	Input Voltage: 120

Shipping:

<u>Carton Weight</u>	<u>Carton Width</u>	<u>Carton Height</u>	<u>Carton Length</u>
9.35 lb	4.72"	38.58"	9.45"
<u>Master Pack Weight</u>	<u>Master Pack Width</u>	<u>Master Pack Height</u>	<u>Master Pack Length</u>
20.90 lb	10.24"	10.24"	39.37"
<u>Master Pack Qty</u>	<u>UPC</u>	<u>UPS</u>	
2.0000	845094081197	Yes	

Finish:

Satin Aluminum SA

Material:

Aluminum

Certification:

Dry Location
Energy Star
CA Title 24
ADA

Additional:

PCB (Included)
Adjustable