

# 2' Linkable Strip Light

# LED

## 10 Watt 900 lm Strip Light Specifications




The ETi 2' Linkable LED Strip Light offers exceptional performance as a high quality replacement for traditional fluorescent light sources. Lasting more than 5 times longer than fluorescent alternatives, these strip lights reduce energy and maintenance costs. A special benefit of these ETi Strip Lights is the linking feature - multiple fixtures can be connected using a linking cable or end-to-end connector, both included. Engineered to be installed as either a plug-in or direct wire fixture, an optional mounting plate (Item 54657102) is also available. The strip lights are 120v, UL listed for use in damp locations, and suitable for installations from - 4° F to 95° F. Warranty 5 years.

### KEY FEATURES & BENEFITS

- Installation as Portable/Plug In or Direct Wire
- 900 Lumens & 10 Watts providing 90 LPW
- Linkable via cable or end to end connector
- 120 Volt, 4000K, 80 CRI
- cULus Listed for Damp Locations
- Replaces most applications using 17w fluorescent lamps
- Rated life 50,000 hours (45.6 years)

### FIXTURE DIMENSIONS



SKU# 54263143  
 Dimension A = 24"  
 Dimension B = 4"



This light source meets restrictions on hazardous substances.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see [www.etiled.us/fcc15b](http://www.etiled.us/fcc15b)

### APPLICATION INFORMATION

Designed to be used anywhere a traditional fluorescent fixture is used. Typically used in work shops, garages and utility rooms. Other common applications in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.



855-384-7754 [www.etissl.com](http://www.etissl.com)

# 2' Linkable Strip Light

# LED

## SPECIFICATION DATA

Project \_\_\_\_\_

Item Number \_\_\_\_\_


Prepared by \_\_\_\_\_ Date \_\_\_\_\_

## ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	CRI <sup>4</sup>	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54263143	LED STRIP LIGHT	10	120	50,000	900	4000K	80	>.9	26	0.0015	247.5	120	60Hz
<sup>1</sup> Hours lifetime with 70% lumen maintenance													
<sup>2</sup> Thermally stable typical lumens (±10%)													
<sup>3</sup> Thermally stable CCT (±10%)													
<sup>4</sup> Color rendering index/Ra													

## SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54263143	849489 002606	3.9" x 24" x 1.6"	1.32	N/A	N/A	N/A	N/A	6	50849489 002601	6.77" x 25.16" x 6.5"	10

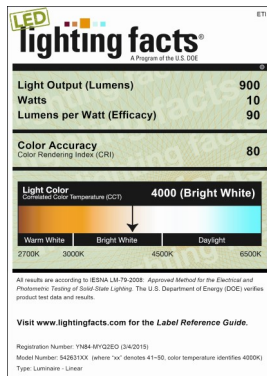

**ETI Solid State Lighting**  
720 Corporate Woods Parkway  
Vernon Hills, IL 60061

855-384-7754 [www.etissl.com](http://www.etissl.com)