

43 K UH4250`a g'2' x 2' Flat Panel

@98
54320161

GD97 = ⇒ 5H-CB 85H5`

h
@ V
h)

CF 89F =B; `B: CFA 5H-CB`

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	R9	Duv	CRI ⁴	CBCP	Beam	Power Factor	Operating Frequency
50228161	2'x2' Flat Panel	42.5	120-277	50,000 hrs	4250	5000K							60Hz
TBD	Øarth`ua`e Ôlips Ç20												
TBD	Flushmount mounting plate Ç10												

¹ Hours lifetime with 70% lumen maintenance


² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)

⁴ Color rendering index/Ra

G< =DD-B; `B: CFA 5H-CB`

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54320161											

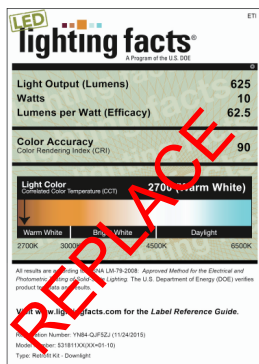

H\Y`5a YfJWg` < YUXei UfHYfg`
720 Corporate Woods PKWY
Vernon Hills, IL 60061

,))! , (!++) (`k k k "Yhgg"Vt'a