

15" Round Flush Mount

LED

22 Watt 1550lms Round Flush Mount Specifications



The ETi 22 watt 1550 lumen LED round flush mount fixture offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Lasting over 10 times longer, these flush mount fixtures are high quality replacements for incandescent flush mount fixtures and is available in 4000K. They are UL listed for use in damp and dry locations. Warranty 5 years. Suitable for installations from - 4° F to 95° F.


KEY FEATURES & BENEFITS

- 22 Watt Low Power and High Performance
- 1550 lumens
- Dimmable
- 82 CRI , 4000K
- UL-Damp and Dry Locations
- Replaces most applications using 100w incandescent lamps
- Rated life 50,000 hours



This light source meets restrictions on hazardous substances.

FIXTURE DIMENSIONS



SKU# 54620142

Dimension A = 15.4"

Dimension B = 3.5"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Designed to be used anywhere a standard incandescent fixture is used. Typically used in bedrooms, hallways, kitchens, living rooms and recreational rooms. Other applications apply in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.



ETI SOLID STATE™
LIGHTING
INC.

855-384-7754 www.etissl.com

22 Watt 1550lms 15" Round Flush Mount

LED

SPECIFICATION DATA

Project _____

Item Number _____


Prepared by _____ Date _____

ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54620142	LED22w FLUSH-MOUNT 82120 DIM	22	120	50,000	1550	4000K	88.8	>.99	48	-0.0006	506	115	60Hz
¹ Hours lifetime with 70% lumen maintenance													
² Thermally stable typical lumens (±10%)													
³ Thermally stable CCT (±10%)													
⁴ Color rendering index/Ra													

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54620142	836607009371	17.4" x 17.24" x 4.4"	3.4	N/A	N/A	N/A	N/A	3	50836607009376	18.4" x 17.6" x 14.2"	11.66

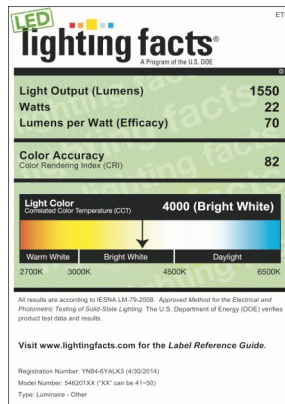

ADA Compliant

Meets American with Disabilities Act standard extension requirements.

The Americas Headquarters
26650 Renaissance Parkway, STE 6
Cleveland, OH 44128

855-384-7754 www.etissl.com