




# 4FT LED Wrap Light

54676241

Part# WR-4-40-940-MV-D

## SPECIFICATIONS

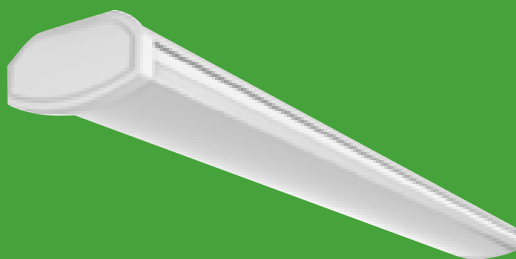


The ETi 4' LED Wrap light offers exceptional performance as a high quality replacement for traditional fluorescent light sources. Using only 40 watts of power to deliver 3600 lumens and lasting more than 5 times longer than fluorescent alternatives, this wrap light reduces energy and maintenance costs.

Designed to be used anywhere a traditional fluorescent fixture is used. Typically used in work shops, garages and utility rooms. Other common applications in commercial, office, retail, restaurants, schools, hospitals, hotel and motel locations.

### KEY FEATURES & BENEFITS

- 40 W
- 3600 LM
- 4000K
- CRI  $\geq 90$
- Dimmable
- Damp Locations
- 50,000 hours rated life
- 5 years Warranty
- Operating Temperature: -4°F~95°F

### FIXTURE DIMENSIONS



Part# WR-4-40-940-MV-D  
Dimension A= 48"  
Dimension B= 3"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see [www.etissl.us/fcc15b](http://www.etissl.us/fcc15b)

[www.etissl.com](http://www.etissl.com)  
855-384-7754



# 4FT LED Wrap Light

54676241

Part# WR-4-40-940-MV-D

## SPECIFICATION DATA

Item Number	Description	Watts	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	CRI <sup>4</sup>	Power Factor	R9	Beam Angle	Operating Frequency
54676241	LED Wrap Light	40	120-277	50,000 hours	3600	4000	≥90	>0.9	85	100°	50/60Hz

<sup>1</sup> Hours lifetime with 70% lumen maintenance

<sup>2</sup> Thermally stable typical lumens

<sup>3</sup> in compliance with ANSI C77.378 201X


<sup>4</sup> Color rendering index/Ra

## SHIPPING INFORMATION


Item Number	Item UPC	Item Dimensions (L x W x H)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (L x W x H)	Inner Pack Weight (lbs) Dimensions (L x W x H)	Master Pack QTY	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54676241	849489 000336	48"x 6"x 3"	4.11	NA	NA	NA	NA	2	5084948 9000331	52.28" x 8.27" x 7.6"	13.62



The Americas Headquarters  
720 Corporate Woods Parkway  
Vernon Hills, IL 60061  
855-384-7754  
[www.etissl.com](http://www.etissl.com)

ETI

Light Output (Lumens)	3600
Watts	40
Lumens per Watt (Efficacy)	90
Color Accuracy Color Rendering Index (CRI)	90
Light Color Correlated Color Temperature (CCT)	4000 (Bright White)



2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: YN84-8ICZA1 (6/6/2017)  
Model Number: 54676241/###(##=41-50)  
Type: Luminaire - Linear

