

Type
Project
Catalog No.
Lamp/Wattage

NHR-26Q
6" Non-IC Line Voltage Remodel Housing

Source: 150W Max. (Varies with trim)

PRODUCT DESCRIPTION

Remodel housing for use in existing sheet rock ceilings where access is only available from below the ceiling.

FEATURES

- Internal thermal protection
- cULus listed for damp location and through branch circuit wiring
- Quick connect provided
- Installation-ready for existing sheet rock ceilings
- Accommodates 1-3/8" maximum ceiling thickness

CONSTRUCTION

Housing

0.040 aluminum adjusts to a maximum ceiling thickness of 1-3/8" (35mm). Housing terminates at 1/4" ceiling flange for even positioning of housing angle within the ceiling. Structural arm consisting of 0.050 structural steel connects housing with junction box.

Minimum Clearance

Non-IC housings require minimum clearance of 3" from thermal insulation and 1/2" from adjacent building components.

Socket

Galvanized steel socket plate adjusts inside housing for optimum light performance. Contains a single medium base socket. Protective cap included to protect socket interior during ceiling painting. Socket plate can be removed in the field to convert to a floating socket.

Mounting

Four high tension springs secure the housing to an existing sheet rock ceiling. Accommodates ceiling thickness to 1-3/8" (35mm).

Junction Box

Plaster frame integrated 15 cu. in. junction box 0.064 galvanized steel with five 1/2", two 3/4" knockouts, and four Romex® pryouts. Electrical grounding automatic when feeding with grounded steel EMT pipe or flex. Green wire provided for installations with ground wire fed through PVC pipe conduit.

Quick Connect Feature

Housing contains three UL approved quick connections that allow insertion of 1/4" stripped solid or tinned standard conductors to be inserted into the connector. Connectors are pre-attached to fixture power, common, and ground circuits.

Thermal Protector

Standard UL thermal protector rated for 90°C is affixed to inner top surface of housing.

Lamp


150W max. - lamp and wattage varies with trim (ordered separately)

Labels and Listings

cULus Listed for Damp Location w/ Feed Through
 cULus Wet Listed (Only with designated trims)
 NYC Approved: Calendar #43895



DIMENSIONS

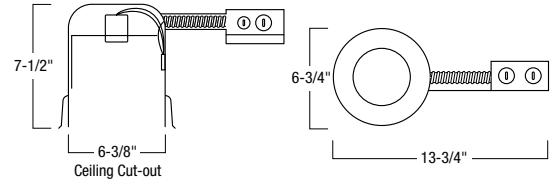

Cut-out: 6-3/8"
 ID: 6"

Housing Length: 13-3/4"
 Housing Width: 6-3/4"
 Housing Height: 7-1/2"

Housings

NHR-26Q: 6" Non-IC Line Voltage Remodel Housing, Adjustable Socket Bracket