




Features

- Excellent color rendering (90+ CRI)
- Color temperatures from 2700K to 4000K
- Up to 121 lumens per foot performance
- Consumes up to 1.46 watts per foot
- Dimmable with ELV dimmers
- Cuttable every 1.97"
- 65.6 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

Available CCT



2700K 3000K 4000K

Control Options

- Trulux Single Color Controls
 - Requires LED-DR Driver + Trulux Receiver
- Primary Side Dimming
 - Requires Standard Dimmer + ELV Driver or LP-DR Driver

Listing / Ratings




TRULUX™ High Output Max - 24V

For large scale projects, High Output Max (run) Tape provides a more convenient installation by minimizing drivers and connections. HTMR is a great tool for lighting coves, corridors, lobbies, and retail spaces with your choice of 2700K, 3000K, or 4000K white light.

Technical Information

Series	HTMR
Input Voltage	24V
CCT	2700K / 3000K / 4000K
CRI	90+
Wattage	Up to 1.46W per ft
Lumens	Up to 121lm per ft
Max Run	65.6 feet
Cuttable	Every 1.97"
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

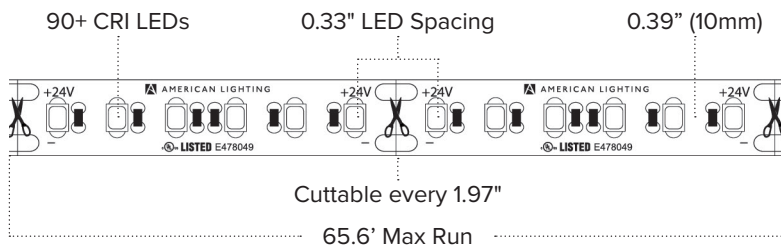



2700K
Ultra Warm White
1.46W per ft / 118Lm per ft

3000K
Warm White
1.46W per ft / 120Lm per ft

4000K
White
1.46W per ft / 121Lm per ft

Kits



HTMR-UWW (65.6ft)

HTMR-WW (65.6ft)







HTMR-WH (65.6ft)

HTMR (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT, and (3) connector blocks





Building a Single Color Trulux System?

See pages (22-23) for compatible single color Trulux controllers




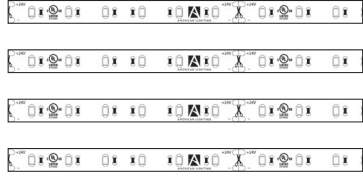
Trulux Single Color Accessories

					
Trulink 4-in-1 Connector Kit TL-CONKIT	Trulink 4-in-1 Connector Block TL-BLKS (Qty 10)	TL-2SPL Splice Connector TL-2L (L) Snap connector TL-2T (T) Snap connector TL-2X (X) Snap connector	Linking Cables (IP54) TL-2JUMP-.5 (6") TL-2JUMP-1 (12") TL-2JUMP-2 (24")	DC Connector Snap to DC Jack TL-2DC	Linking Cables (IP65) TL-2JUMP65-.5 (6") TL-2JUMP65-1 (12") TL-2JUMP65-2 (24")




Trulux Controller Set-up

	+		+		+	
Push Dial Controller (Single zone)		LED-DR 24V Driver (30W, 60W, 100W, 150W)		Trulux RF Receiver (Required per zone)		Trulux Tape Light

Trulux 4 Zone Controller Set-up

	+		+		+	
Touch Side Controller (4 zone)		LED-DR 24V Driver (30W, 60W, 100W, 150W)		Trulux RF Receiver (Required per zone)		Trulux Tape Light

Primary Side Dimming Set-up

	+		+	
Standard Dimmer		ELV 24V Driver (30W, 45W, 60W, 80W)		Trulux Tape Light