EPIQ-MAG 6" Remodel Downlight

Description

Versatile and affordable LED remodel downlight that includes a remote driver with attached junction box and spring loaded mounting clips for ease of installation

Features

- Metal core PCB with enhanced aluminum heat sink
- Remote driver with attached junction box
- Stamped aluminum trims with durable baked enamel finish
- Frosted polycarbonate lens diffuses light
- cETLus Listed for Type IC and wet locations

Mounting

Remodel: Spring loaded mounting clips for direct installation

Applications

General Lighting LED Remodel; new construction mounting plates available (sold separately)

Warranty

Dimensions

5 years



В

EM6

5.7" (145mm)

Trim Dia: 7.62" (193mm)

Inner Trim Dia:

Regression to lens: 2.6" (68mm)

Lens Width: 2.6" (68mm)

Cut out Dia: 6.5" (165mm)

Overall Depth: 6.5" (165mm)



 $\overline{\mathbb{O}}$

Junction Box

Length: 7.37" (187mm)

Width: 3.41" (86mm)

Height: 1.37" (35mm)

(4) 0.875" Knockout


Wire compartment

(58.5mm x 82mm)

Technical Information

Size	6"	6"		
Voltage	120V AC, 50/60Hz	120-277V AC		
Finish	White	Alzak		
CCT	3000K	4000K		
Series	EM6-30-WH	EM6-40-AZ		
Lumens	1750Lm	2000Lm		
Wattage	25.1W	23.8W		
CRI	92+			
Inset	Smooth			
Beam Angle	44°	38°		
Dimming	10-100% (TRIAC, CL, ELV)	0-10V (120-277V)		
Rating	Energy Star; cETLus Listed; Type IC; Wet location			
Rated Life	50,000 Hours			

Ordering Information

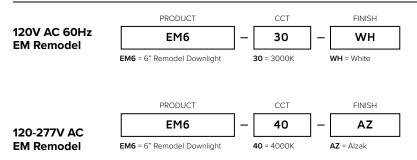

EM Series Remodel Downlights Include:

(1) Epiq Mag Remodel Downlight with remote driver + attached junction box and spring loaded mounting clips

Page 1 of 2





White

Alzak




Accessories

Image	Part Number	Description	
RP-E6/M6		6" Epiq-Mag Aluminum rough-in plate for new construction	

Additional Information

Model	Cut-out Size	Minimum Height Requirement	Location
EM6	6-1/2" (165mm)	6-1/2"	Indoor/Outdoor Dry, damp, or wet location

Photometrics

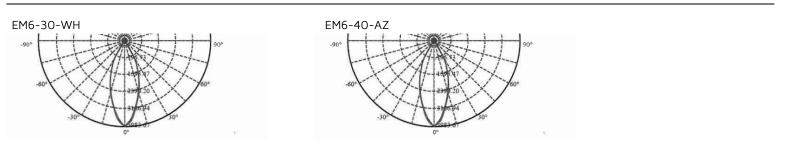

NOTES