

PROJECT: TYPE:

LOCATION: CAT:



Description

The Invisible Slot is designed to be used in drywall and other flat surfaces during remodeling or new construction. Subset flanged edges on either side disappear beneath drywall mud for a clean line-of-light look.

Features

- Extruded aluminum construction
- Use tape light, lens, and end caps to create a complete fixture (tape light and accessories sold separately)

Mounting

Recess mount via screws or construction adhesive during new construction or remodel; seal in flanges during mud work, texturing, and painting.

Applications



Lines of light across walls, ceilings, and other flat surfaces

Warranty

3 years

Technical Information

Profile Dimensions

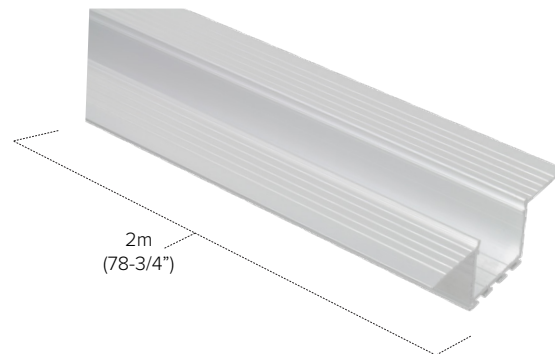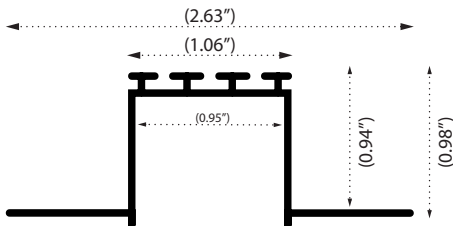



Ordering Information

	MODEL		TYPE		LENGTH
Invisible Slot Extrusion	PE	-	INVSLOT	-	2M

PE-INVSLOT-2M includes:
(1) 2M Invisible Slot extrusion

Accessories

Image	Part Number	Description
	PE-SLOTLENS-2M	2 meter frosted polycarbonate lens for Invisible Slot extrusion; UV Resistant/Flame Retardant
	PE-INVSLOT-END	Polypropylene plastic end cap for Invisible Slot extrusion