


PROJECT: TYPE:

LOCATION: CAT:

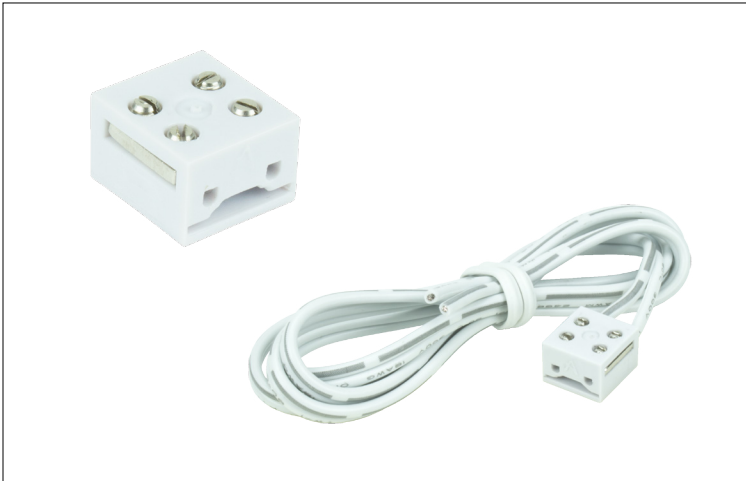

Description

This multipurpose connector block powers, splices, and connects Trulux Single Color tape light in multiple fashions and is designed to make installations faster and easier.

Features

- Reliable connection every time
- Durable and compact construction
- Available as a connection block (TL-BLKS, sold in bags of 10) or a power connection kit including 36" of 18AWG wire (TL-CONKIT)
- For use with Single color (UWX, UWW, WW, WH) Trulux in Standard IP54/IP65*, High Output IP54/IP65*, or Spec Grade IP54/IP65* options (*IP65 modification: You will need to remove the first 1/4" of protective coating at the cut end in order for tape light to fit into the Trulink Connector)

Mounting


Surface or recess mount via attached 3M® double-sided adhesive tape; Compatible with the following extrusions: Olin, Turbo, Premium 45, Double Flange, Universal, Paver, and assorted drywall slot extrusions

Applications

Connecting Trulux tape light via wire-to-tape, tape-to-tape splice, tape-to-tape jumper, or tape-to-tape with central feed

Technical Information

Dimensions

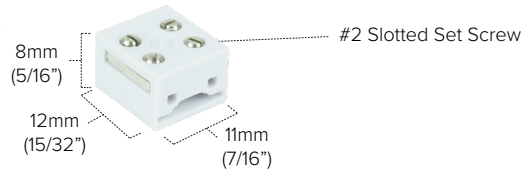

Ordering Information

Trulink Connector MODEL: **TL** TYPE:

CONKIT = (1) Trulink Connector block with 36" lead
BLKS = (10) Trulink Connector blocks

Wire-to-Tape



Tape-to-Tape Splice



Tape-to-Tape Jumper



Tape-to-Tape with Central Feed

