

RECTANGULAR COB

New updated version of the classic Rectangular Wall Pack, now with COB LEDs which deliver up to 5100 lumens of light. All COB1 and COB2 fixtures use the same size die-cast housing.

Performance

- Sturdy housing has aggressive heat ventilation via integrated convection fins
- 4000K and 5000K versions with 80+ CRI light combine great illumination, longevity and energy savings
- Angled COB mounting plate and prismatic acrylic lens create a wide distribution of light

Construction


- Durable die-cast aluminum housing with heat ventilation fins and powder coat finish
- Clear prismatic injection molded acrylic lens
- 1/2" knockouts at both ends and top center

Installation

- Suitable for wet locations, surface mount only
- Open hinged lens frame (#2 Phillips/flathead screws) to access oversized wiring compartment with universal mounting bracket (remove knockouts for mounting screws as needed)
- 18AWG supply wires are pre-wired to one or two drivers for COB1 or COB2, respectively
- 1/2" NPS located at top center of housing for pencil photocell as needed (optional, sold separately)



Photometrics

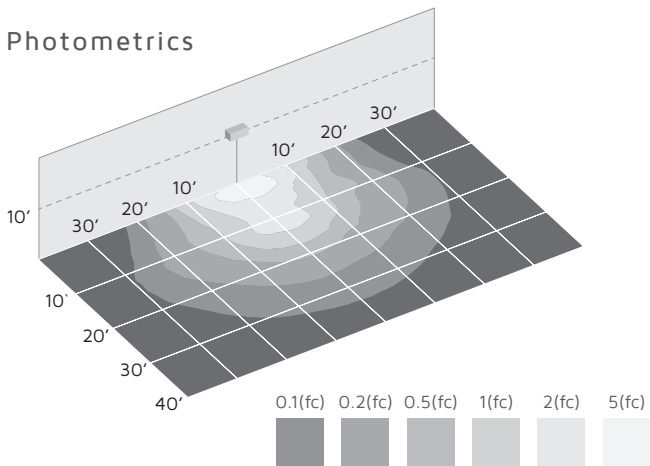

*Footcandle values based on 10ft mounting height for WP-R2-40-DB.

Specifications

Series	WP-R (COB Series)
Input voltage	120-277V AC, 50/60Hz
Color temperatures	4000K and 5000K
CRI	80+
Wattage	33W / 80W
Lumens	See individual product
Beam angle	169°H x 115°V
Housing	Die-cast powder coat aluminum
Lens	Clear prismatic acrylic
Rating	c/UL/us Listed for wet locations
Dimensions	9-1/8"H x 14-1/8"W x 6"D
Switching	Branch circuit, PC-120 or PC-277
Mounting	Surface mount
LED type	COB (Chip on Board) LED
Rated life	50,000 hrs

Rectangular COB Wall Mount & Accessories



WP-R1-40-DB
Rectangular COB1
4000K / 33W
2000Lm



WP-R1-50-DB
Rectangular COB1
5000K / 33W
2100Lm



WP-R2-40-DB
Rectangular COB2
4000K / 80W
5000Lm



WP-R2-50-DB
Rectangular COB2
5000K / 80W
5100Lm



PC-120 (120V AC)
PC-277 (208-277V AC)
Dusk to dawn pencil photocell
for 1/2" NPS hole