



ELX Series

Thermoplastic Exit Sign



Standard Features

- Rugged off-white thermoplastic construction
- Even illumination for excellent legibility
- Snap-together design for quick and easy installation
- Universal mounting, complete with 2 faces, backplate, and canopy
- Replaceable knockout directional chevrons
- Energy efficient, long-life red or green LEDs
- Listed to UL Standard 924
- Complies with NEC, Life Safety Code and OSHA.
- Damp location listing is standard on all models

Emergency Models

- Replaceable, sealed Nickel-Cadmium battery
- Provides a minimum 90 minutes of continuous emergency illumination
- Energy star compliant
- Batteries recharge per UL924 specifications
- All exit sign models consume less than 5 watts

Charger


- 120/277VAC input
- Fully automatic charger
- Temperature compensated
- Brownout protection
- Short circuit protected
- Low voltage battery disconnect
- Push to test switch
- AC pilot light

ELX Series Offered Models

AC-only exit signs, red or green
Self-powered exit signs, red or green

Outline and Dimensions

Dimensions are approximate and subject to change.

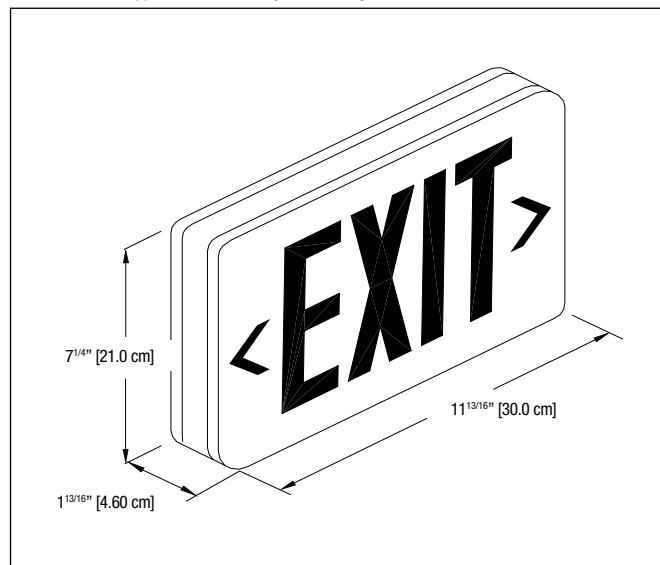

Accessories (order as a separate item)

Description	Add Suffix
Wire Guard	-
Wire mount	WG1-E
Ceiling or end mount	WG5-E

How to Order

Series	Stencil Face
ELX400= AC-only	RN= Red
ELXN400= Self-powered	GN= Green

EXAMPLE: ELX400RN