

ProLED Omnidirectional A-Shape



NEW!

Specifications

- 300° Omnidirectional
- Damp location rated
- Dimmable to 5% for design flexibility
- 2700K, 3000K OR 4000K CCT
- 82 CRI for quality and consistent color rendering
- ENERGY STAR listed options
- No Mercury or UV/IR emissions
- RoHS Compliant
- Not rated for enclosed fixtures
- 5-Year Limited Warranty



Markets & Applications

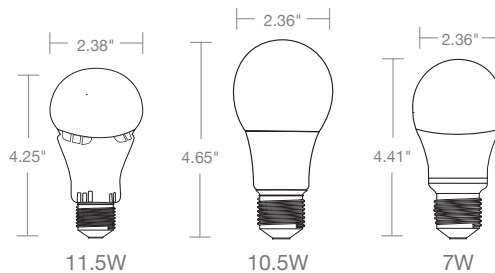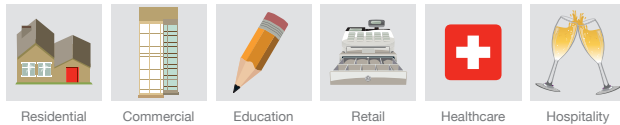


Ordering Information



Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Wattage Equivalent
7 Watt	Med.	80841	A19FR7/827/OMNI/LED	120	2700	82	470	25000	1/30	4.41"	40
7 Watt	Med.	80842	A19FR7/830/OMNI/LED	120	3000	82	500	25000	1/30	4.41"	40
10.5 Watt	Med.	80857	A19FR10/827/OMNI/LED	120	2700	82	810	25000	1/24	4.65"	60
10.5 Watt	Med.	80864	A19FR10/830/OMNI/LED Available November 2014	120	3000	82	820	25000	1/24	4.65"	60
10.5 Watt	Med.	80865	A19FR10/840/OMNI/LED Available November 2014	120	4000	82	870	25000	1/24	4.65"	60
11.5 Watt	Med.	80826	A19FR11/827/OMNI/LED	120	2700	82	800	25000	1/30	4.25"	60
11.5 Watt	Med.	80827	A19FR11/830/OMNI/LED	120	3000	82	800	25000	1/30	4.25"	60

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point at decreased light levels. May not be compatible with all dimming systems, dimming performance may vary by system, please visit www.halcolighting.com/ProLEDDim for dimmer compatibility information. Use on incompatible systems may shorten lamp life.
Represents lamps that are ENERGY STAR approved.

Energy Savings Comparison

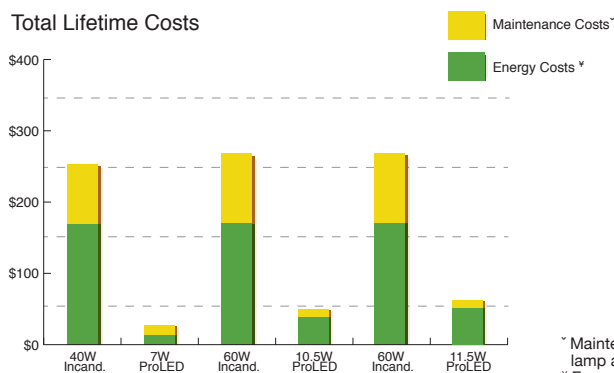

* Maintenance costs based on 15 minutes to replace the lamp at \$40 per/hr over the life of the ProLED lamp.
* Energy costs based on \$0.11 kWh over 25,000 hour life.