



LED LUMINAIRES

ProLED[®] **Panel Light Series**



Dimmable



75,000 Hour Life



Low Maintenance

10 YR
WARRANTY

Ten Year Warranty



DLC QPL Listed

Maximizes value as an energy efficient alternative to recessed fluorescent fixtures



**Specification Grade
Architectural Design**

Direct Backlit Design

**Backed by a 10-Year
Warranty**

Applications:

Office
Lobby
Hallway
Conference Room
Classroom

Markets:

Commercial
Healthcare
Hospitality
Retail

Halco[®]
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.

800.677.3334 **www.halcolighting.com**

ProLED® Panel Light Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____



Specifications

- Direct backlit design provides a smooth and more uniform light distribution than edge-lit panels
- Remote driver enclosure with multiple knockouts for easy access
- ETL listed for wet locations and non-IC applications



- Quiet & flicker-free LED technology
- Fast access terminal block for easy thru-wire
- 0-10V Dimmable

Dimensions



Panel Light 2' x 2'

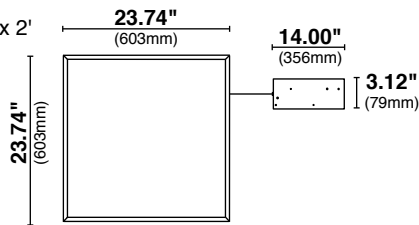

Panel Light 2' x 4'

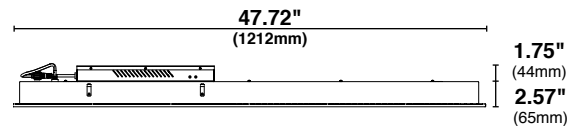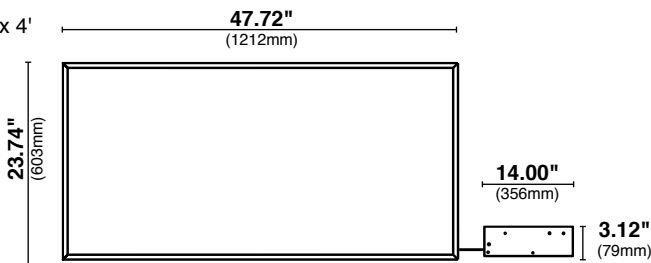

Panel Light 1' x 4'

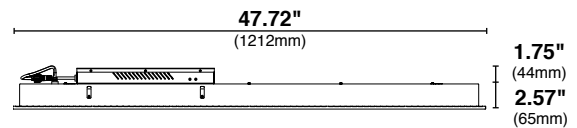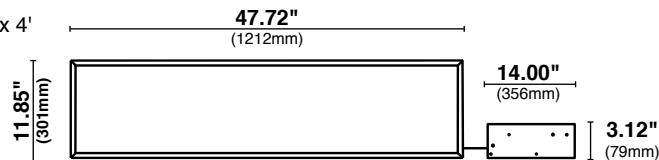

Ordering Information



| | Watt | Product # | Product Code | Volts | Color Temp. | CRI | Lumen Output | Useful Life* | Beam ¹ Spread | Dimmable | DLC [®] Qualified | Equivalent Wattage |
|----------------|------|-----------|-----------------|---------|-------------|-----|--------------|--------------|--------------------------|----------|----------------------------|--------------------|
| 2' x 2' | | | | | | | | | | | | |
| | 30 | 81918 | 22FPL30/835/LED | 100-277 | 3500K | 82 | 3000 | 75,000 | 120° | 0-10V | Yes | (2) 32 |
| | 30 | 81900 | 22FPL30/840/LED | 100-277 | 4000K | 82 | 3150 | 75,000 | 120° | 0-10V | Yes | (2) 32 |
| | 30 | 81901 | 22FPL30/850/LED | 100-277 | 5000K | 82 | 3150 | 75,000 | 120° | 0-10V | Yes | (2) 32 |
| 2' x 4' | | | | | | | | | | | | |
| | 45 | 81942 | 24FPL45/835/LED | 120-277 | 3500K | 82 | 4725 | 75,000 | 120° | 0-10V | Yes | (4) 32 |
| | 45 | 81943 | 24FPL45/840/LED | 120-277 | 4000K | 82 | 4950 | 75,000 | 120° | 0-10V | Yes | (4) 32 |
| | 45 | 81944 | 24FPL45/850/LED | 120-277 | 5000K | 82 | 4950 | 75,000 | 120° | 0-10V | Yes | (4) 32 |
| 1' x 4' | | | | | | | | | | | | |
| | 30 | 81917 | 14FPL30/835/LED | 100-277 | 3500K | 82 | 3000 | 75,000 | 120° | 0-10V | Yes | (2) 32 |
| | 30 | 81908 | 14FPL30/840/LED | 100-277 | 4000K | 82 | 3150 | 75,000 | 120° | 0-10V | Yes | (2) 32 |
| | 30 | 81909 | 14FPL30/850/LED | 100-277 | 5000K | 82 | 3150 | 75,000 | 120° | 0-10V | Yes | (2) 32 |

* Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to operate past this point at decreased light levels.

May not be compatible with all dimming systems, dimming performance may vary by system.

** Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

¹ Visit halcolighting.com for fixture photometry.

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Carlstadt | Cleveland | Houston | Los Angeles | Phoenix
© 2017 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 03-30-17. Re-order #9212.

ProLED[®]

Panel Light Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____


Surface Mount Kit

- Fully powdercoated white surface mount kit allows ProLED Flat Panel and Volumetric Panels to be installed on the surface of drywall or concrete ceilings
- High quality 22 gauge steel
- 3/4" knockout
- Fits multiple standard ceiling box screw patterns
- Easy to install - simply remove access door and slide luminaire onto support rails inside surface mount kit
- Mounting hardware included




Dimensions

SMK22

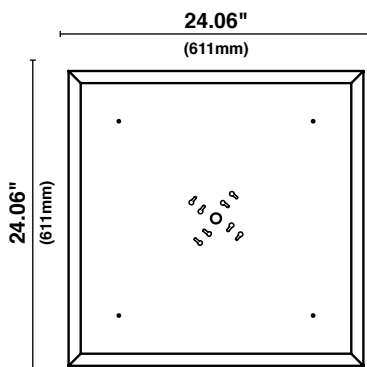

SMK24

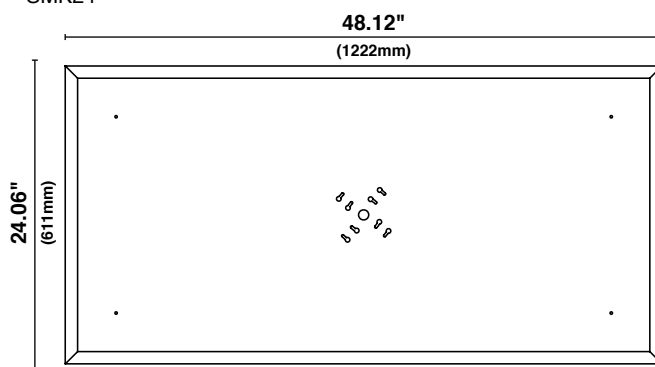

Ordering Information

| Product # | Product Code | Description | Color | Dimensions (L" x W" x H") |
|-----------|--------------|--|-------|---------------------------|
| 81105 | SMK22 | 2' x 2' Surface Mount Kit for Flat and Volumetric LED panels | White | 24.06" x 24.06" x 4.5" |
| 81106 | SMK24 | 2' x 4' Surface Mount Kit for Flat and Volumetric LED panels | White | 48.12" x 24.06" x 4.5" |