

Type _____
 Project _____
 Catalog No. _____
 Lamp/Wattage _____

NTH-REV150
REVO Motorized Universal Track Head

Lamp: 90W PAR 38 (No short necks)

PRODUCT DESCRIPTION

Track head with a motorized horizontal and vertical axis can be adjusted from far below or across the room with patented remote control. The utilitarian style fits almost any design criteria. Die cast aluminum housing and durable components are backed by a 5 year limited warranty.

FEATURES

- Universal E26 base lamp holder
- Compact design
- Dome-shaped laser target for lamp selection
- Dome illuminates to indicate the track head will respond to radio commands
- Radio signals control the fixture - no need to aim the transmitter while adjusting.
- Clutch backed gears allow for hand adjustment without transmitter
- 340° rotation in horizontal axis; 200° in vertical axis
- Powerful motors move the heaviest LED PAR lamps
- Dimmable: Motors will adjust even when track is dimmed.
- Die-cast aluminum housing; powder coated
- Black or White Finishes
- One or two circuit track capable
- Available in J-Style and L-Style (H-Style is Standard)
- Only one transmitter required for any number of REVO fixtures

CONSTRUCTION

Housing

Die-cast aluminum with powder coat finish.

Adjustability

340° horizontal and 200° vertical adjustment.

Contact Head Assembly

Three 0.030 stainless steel contacts mounted in premium plastic housing.

One/Two Circuit Conversion

Positive contact (opposite neutral and ground contacts) is preset to "down" position at the factory, but may be raised to the high position to install onto the second circuit of Nora Lighting's NT-2300 series two-circuit track.

Finishes

Black or White powder coated.

ELECTRICAL

Power Consumption: 0.5W+ lamp

Socket: Medium E26 Porcelain Socket

Input Voltage: 110-120 VAC 60Hz

Lamp: 90W Max. - Medium Base PAR (see compatibility chart on next page)

Applications

Excellent choice for commercial, retail stores, banquet halls, art, and jewelry applications.

Compatibility

Nora track heads are compatible with Halo or any other brands configured to Halo 3 wire track configuration. J-Style and L-Style track adapters are available.

Note: Fixtures may not be compatible with non-Nora monopoint adapters.


Labels and Warranty

cULus Listed

Five Year Limited Warranty




DIMENSIONS

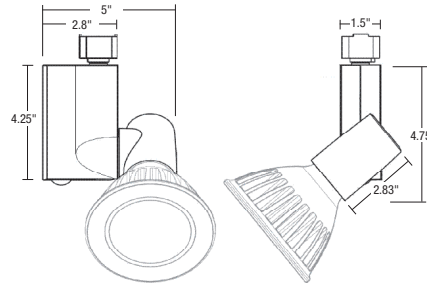

Width: 5"
 Length: 4.25"
 Diameter: 2"
 Max. Extension: 4.75"

Lamp Spec

Suitable for 90W medium base Reflector type lamp. Neck for lamp cannot exceed 1.75" in diameter socket bottom is 2" from top of socket cup. (Requires a long-neck PAR Lamp)

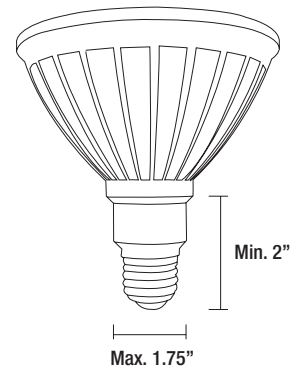

Input: 2x AAA Batteries
 Radio Transmitter 433.92 MHz
 Laser Max Output: <5mW
 Laser Wavelength 630-660 nm
 Weight: 1.8 oz. (45 g.)
 Dimensions: 3.8"x 1.9" x 0.5"
 FCC certified

NTH-REVHHR Handheld Transmitter

REVO Motorized Universal Track Head

- NTH-REV150B REVO Motorized Universal Track Head, 90W, Black
- NTH-REV150W REVO Motorized Universal Track Head, 90W, White

Note:

LED LAMP CHART

The Revo Remote Controlled Track head can be specified with the below LED lamps.
Add the 3 digit suffix to the end of the Revo model number.

ORDER SUUFIX	LAMP TYPE	KELVIN	WATTS	LUMENS	BEAM ANGLE	CBCP	CRI	RATED LIFE	DIMMABLE	NORA MODEL NUMBER LAMP ONLY
LED PAR 20										
A22	PAR 20	2700	8	365	25	1250	83	25K	Yes	8P20LEDA25D27
A23	PAR 20	3000	8	380	25	1300	80	25K	Yes	8P20LEDA25D30
E20	PAR 20	2700	7	300	20	1900	83	25K	Yes	7P20LEDE20D27S
E21	PAR 20	3000	7	300	20	2070	80	25K	Yes	7P20LEDE20D30S
LED PAR 20										
E20	PAR 20	2700	7	300	20	1900	83	25K	Yes	7P20LEDE20D27S
E21	PAR 20	3000	7	300	20	2070	80	25K	Yes	7P20LEDE20D30S
LED PAR 30 LONG NECK										
A34	PAR30	2700	13	680	15	4900	83	25K	Yes	13P30LEDA15D27
A35	PAR30	3000	13	700	15	5100	83	25K	Yes	13P30LEDA15D30
A36	PAR30	2700	13	680	40	1250	83	25K	Yes	13P30LEDA40D27
A37	PAR30	3000	13	700	40	1280	83	25K	Yes	13P30LEDA40D30
LED PAR 38										
A80	PAR38	2700	20	1150	15	7700	80	25K	Yes	20P38LEDA15D27
A81	PAR38	3000	20	1200	15	8100	80	25K	Yes	20P38LEDA15D30
A82	PAR38	2700	20	1150	25	4850	80	25K	Yes	20P38LEDA25D27
A83	PAR38	3000	20	1200	25	5000	80	25K	Yes	20P38LEDA25D30
A84	PAR38	2700	20	1150	40	1970	80	25K	Yes	20P38LEDA40D27
A85	PAR38	3000	20	1200	40	2050	80	25K	Yes	20P38LEDA40D30
E80	PAR38	2700	20	1000	15	8500	80	25K	Yes	20P38LEDE15D27S
E81	PAR38	3000	20	1100	15	9000	80	25K	Yes	20P38LEDE15D30S
E82	PAR38	2700	20	1000	25	3700	80	25K	Yes	20P38LEDE25D27S
E83	PAR38	3000	20	1100	25	4000	80	25K	Yes	20P38LEDE25D30S
E84	PAR38	2700	20	1000	40	1700	80	25K	Yes	20P38LEDE40D27S
E85	PAR38	3000	20	1100	40	1800	80	25K	Yes	20P38LEDE40D30S
LED PAR 38 LOW GLARE										
E86	PAR38	3000	17	820	15	9000	82	50K	No	17P38LEDE15-30S
E87	PAR38	3000	17	820	25	4500	87	50K	No	17P38LEDE25-30S
E88	PAR38	3000	17	820	40	1550	87	50K	No	17P38LEDE40-30S

Example: NTH-REV150W/A81 - White Revo Track head w/ LED 20 watt PAR38 3000K 15° lamp